



IS₀

















Stainless Steel Crowns

Application Procedures



1.800.854.7949




1.800.847.8599




info@denovodental.com





Crown Application

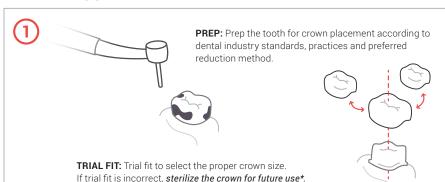



TRIM: Trim the crown to the proper height with curved, stainless steel cutting scissors, making sure to match the contour of the gingival margin. Crown height should match the original tooth before prep, whilst the bottom edge of the crown should not be more than 1mm below the gingival margin to prevent irritation or inflammation.

CONTOUR: Contour the crown walls using crown crimping pliers and bend the gingival third of the crown inward to achieve a tight marginal fit and smooth marginal outline. There should be no or minimal gingival blanching.



SEAT & CEMENT: Seat the customized crown with your preferred glass ionomer and check occlusion.

Have additional questions? Need to re-order? Call us at:

1.800.854.7949

FREE Ground Shipping on Orders Over \$300

Continental US only, certain restrictions apply, see website for full details





CF Certified



Denovo Dental Inc. 5130 Commerce Dr



EC REP KinderDent, Gutenburgstrasse 7 D - 28844 Weyhe, Germany



Denovo Bands are made from surgical grade stainless steel, which contains nickel (9.58%). Nickel has been shown to cause allergic reactions in some patients.



Do not reuse. Appliances are designed and priced to be disposable. If appliance is used for a trial fit only, sterilize for future use.



Aspiration/Ingestion possibility. Use rubber dam on installation and educate patient to avoid hard or chewy substances which could dislodge appliance.

> Denovo products are sold clean but not sterile: sterilization prior to use is recommended for patients with compromised immune systems.

^{*}Crowns can be sterilized using autoclave, chemiclave or dry heat.